




LED - Aufbaupanel, rund, 17.3W 1600 lm

Eigenschaften:

Beschreibung:	LT-DL08DA-SM, LED Aufbaupanel, rund, 17.3W
Abmessungen:	D=240mm, H=40mm
Betriebsspannung:	100.....240 VAC
Nennleistung:	17.3W
Ersatz für:	100W Halogen
Leistungsfaktor:	> 0.9
Lichtstrom:	1430/1460/1600 lm
Farbwiedergabe CRI:	>80
Abstrahlwinkel:	110°
Dimmbar:	Ja, TRIAC oder 1-10V
LED Quelle:	LED 2835
Farbtemperatur:	WW 3000K / NW 4000K / CW 5700K
Lebensdauer:	30'000 Std.
Material:	Aluminium
Gehäusefarbe:	weiss
Montage:	2 Bohrlöcher für Deckenmontage, U-Halterung, inkl. Netzteil
Zertifizierungen:	CE/RoHS/EN 62471
Schutzart:	IP40
Betriebstemperatur:	-20°C - +50°C
Gewicht:	0.83 kg
Garantie:	3 Jahre

Lichtdiagramm 3000/4000/5700K

ww 3000K 110°

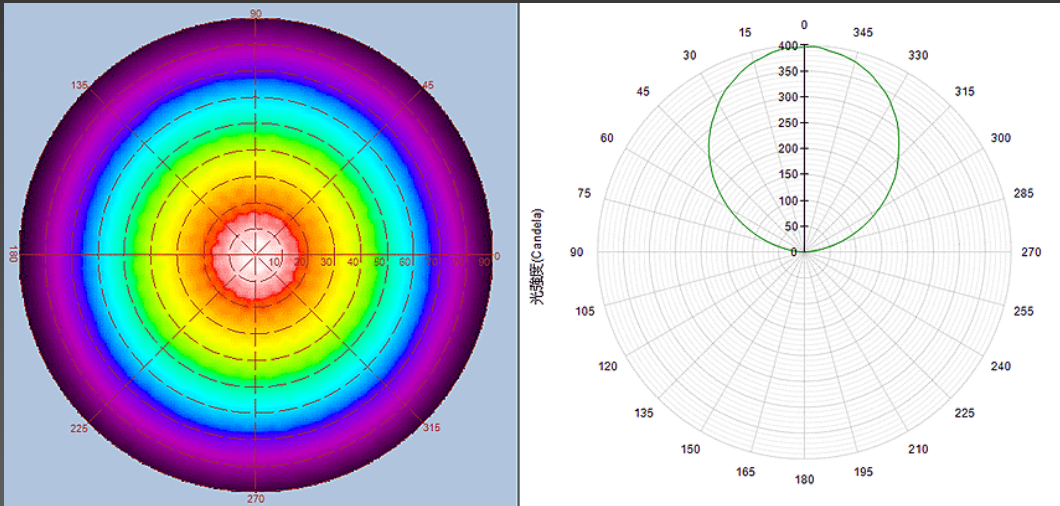


Height	E Max.	Diameter
1.0M	434 Lx	291 cm
2.0M	103 Lx	582 cm
3.0M	45 Lx	873 cm
4.0M	25 Lx	1164 cm
5.0M	16 Lx	1455 cm

The diagram shows a light cone originating from a point at the top. Five horizontal yellow ellipses are drawn at different heights, representing the beam diameter at those heights. The ellipses increase in size as the height increases, matching the data in the table.

Lichtdiagramm 3000/4000/5700K

ww 4000K 110°

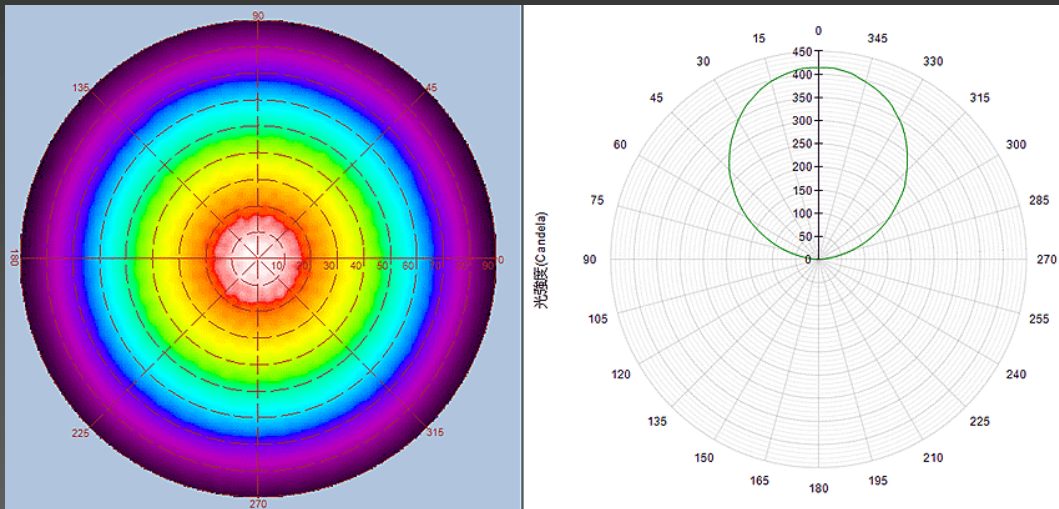


Height	E Max.	Diameter
1.0M	457 Lx	288 cm
2.0M	108 Lx	576 cm
3.0M	47 Lx	864 cm
4.0M	26 Lx	1153 cm
5.0M	17 Lx	1441 cm

The diagram shows a light cone originating from a point at the top. Five horizontal yellow ellipses are drawn across the cone at different heights, corresponding to the data in the table. The ellipses increase in size as the height increases, illustrating the beam spread.

Lichtdiagramm 3000/4000/5700K

ww 5700K 110°

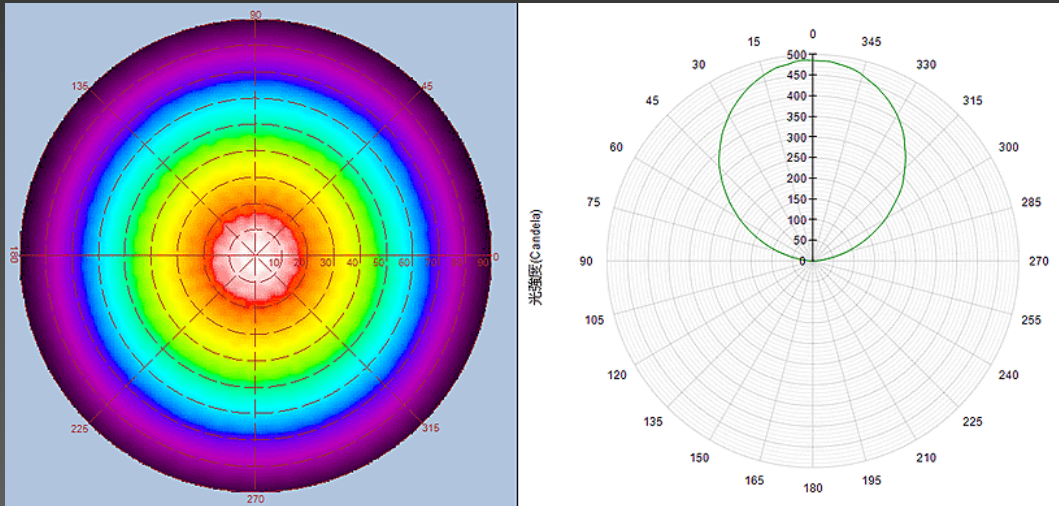

Height	E Max.	Diameter
1.0M	537 Lx	288 cm
2.0M	125 Lx	576 cm
3.0M	55 Lx	864 cm
4.0M	30 Lx	1153 cm
5.0M	19 Lx	1441 cm

The diagram shows a light cone with a dashed blue outline. Five horizontal yellow ellipses are placed at different heights within the cone, corresponding to the data in the table. The ellipses increase in size as the height increases, illustrating the beam spread.