




LED - Aufbaupanel, rund, 24W 2300 lm

Eigenschaften:

Beschreibung:	LT-DL10DA-SM, LED Aufbaupanel, rund, 24W
Abmessungen:	D=300mm, H=40mm
Betriebsspannung:	100.....240 VAC
Nennleistung:	24W
Ersatz für:	120W Halogen
Leistungsfaktor:	> 0.85
Lichtstrom:	2080/2200/2300 lm
Farbwiedergabe CRI:	>80
Abstrahlwinkel:	110°
Dimmbar:	Ja, TRIAC oder 1-10V
LED Quelle:	LED 2835
Farbtemperatur:	WW 3000K / NW 4000K / CW 5700K
Lebensdauer:	30'000 Std.
Material:	Aluminium
Gehäusefarbe:	weiss
Montage:	2 Bohrlöcher für Deckenmontage, U-Halterung, inkl. Netzteil
Zertifizierungen:	CE/RoHS/EN 62471
Schutzart:	IP40
Betriebstemperatur:	-20°C - +40°C
Gewicht:	1.3 kg
Garantie:	3 Jahre

Lichtdiagramm 3000/4000/5700K

ww 3000K 110°

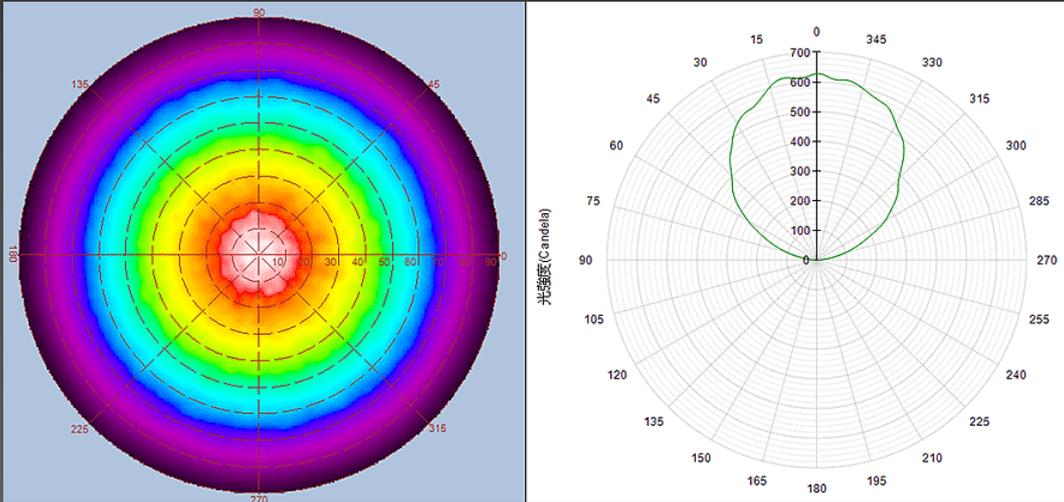


Height	E Max.	Diameter
1.0M	684 Lx	296 cm
2.0M	162 Lx	593 cm
3.0M	70 Lx	889 cm
4.0M	39 Lx	1186 cm
5.0M	25 Lx	1482 cm

The diagram shows a light cone with a dashed blue outline. Five horizontal yellow ellipses are placed at different heights within the cone, corresponding to the data in the table. The ellipses increase in size as the height increases, illustrating the beam's spread.

Lichtdiagramm 3000/4000/5700K

ww 4000K 110°

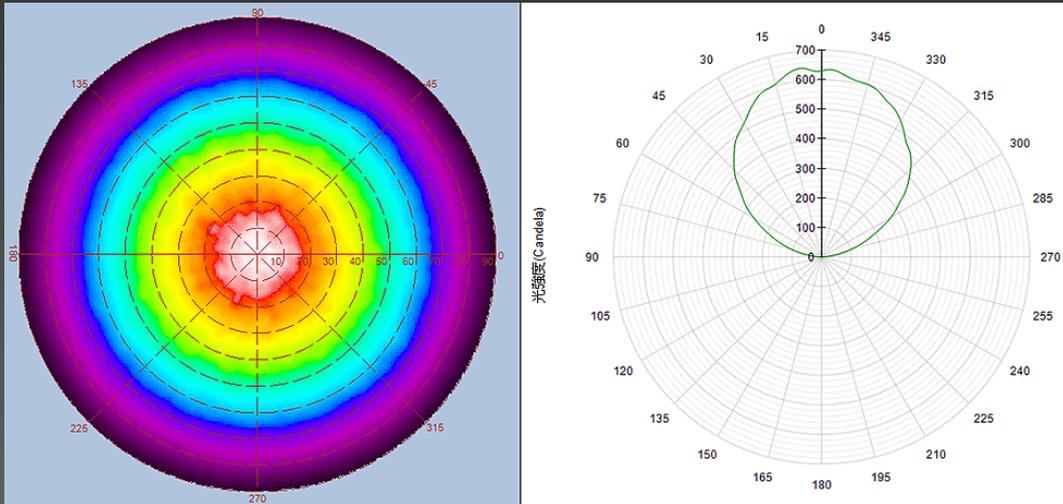


Height	E Max.	Diameter
1.0M	696 Lx	296 cm
2.0M	165 Lx	593 cm
3.0M	72 Lx	889 cm
4.0M	40 Lx	1186 cm
5.0M	25 Lx	1482 cm

The diagram shows a light cone with a dashed blue outline. Five horizontal yellow ellipses are placed at different heights within the cone, corresponding to the data in the table. The ellipses increase in size as the height increases, illustrating the beam's spread.

Lichtdiagramm 3000/4000/5700K

ww 5700K 110°

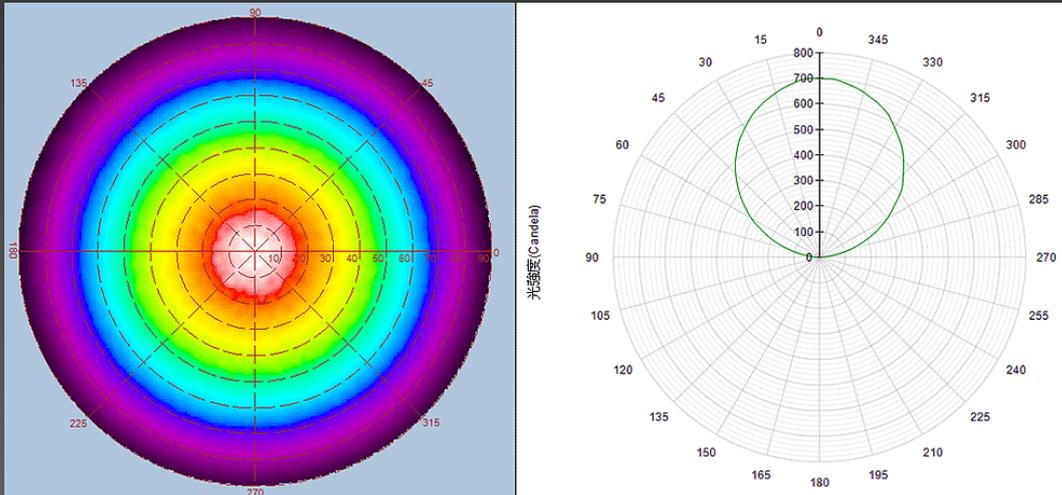

Height	E Max.	Diameter
1.0M	763 Lx	296 cm
2.0M	183 Lx	593 cm
3.0M	79 Lx	889 cm
4.0M	44 Lx	1186 cm
5.0M	28 Lx	1482 cm

The diagram shows a light cone with a dashed blue outline. Five horizontal yellow ellipses are placed at different heights within the cone, corresponding to the data in the table. The ellipses increase in size as the height increases, illustrating the beam spread.