




LED - Panel, quadratisch, 44W 3950 lm

Eigenschaften:

Beschreibung:	LT-PL0606, LED Einbaupanel, quadratisch, 44W
Abmessungen:	L=595mm, B=595mm, H=10mm
Betriebsspannung:	100.....240 VAC
Nennleistung:	44W
Ersatz für:	150W Halogen
Leistungsfaktor:	> 0.91
Lichtstrom:	3650/3900/3950 lm
Farbwiedergabe CRI:	>80
Abstrahlwinkel:	110°
Dimmbar:	Ja
LED Quelle:	SMD LED 2835
Farbtemperatur:	WW 3000K / NW 4000K / CW 5700K
Lebensdauer:	30'000 Std.
Material:	Aluminium
Gehäusefarbe:	silber/alu
Montage:	Rastereinbau, Aufbau oder hängende Montage, inkl. Netzteil
Zertifizierungen:	CE/RoHS/FCC/EN 62471/LM-79-08
Schutzart:	IP40
Betriebstemperatur:	-20°C - +40°C
Gewicht:	3.5 kg
Garantie:	3 Jahre


Lichtdiagramm 3000K

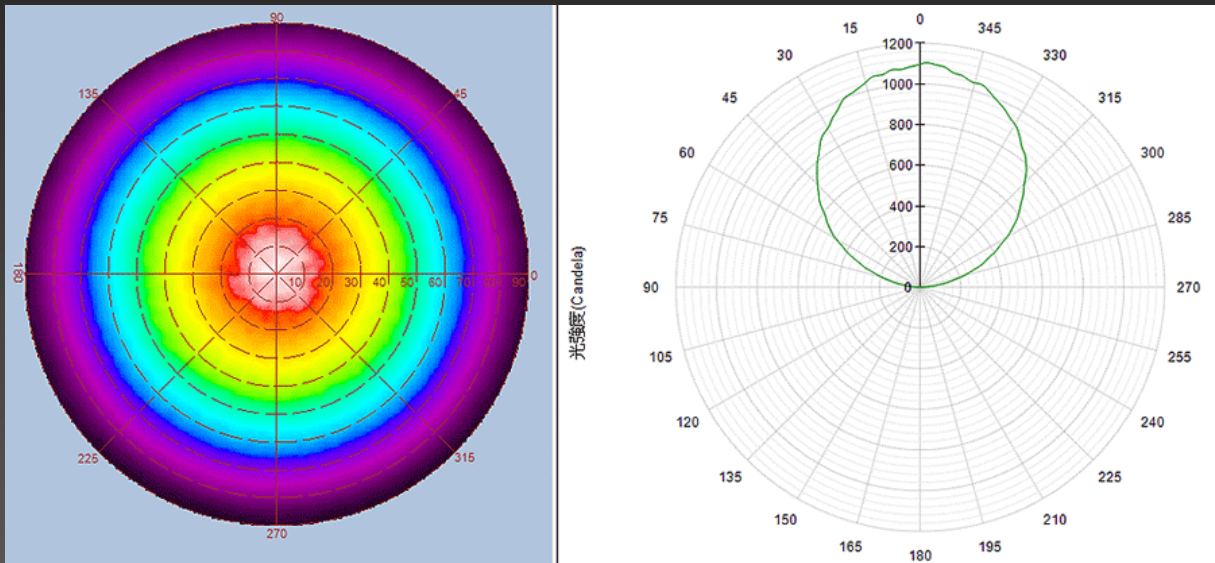


Height	E Max.	Diameter
1.0M	1147 Lx	302 cm
2.0M	291 Lx	604 cm
3.0M	128 Lx	907 cm
4.0M	71 Lx	1209 cm
5.0M	46 Lx	1511 cm

The diagram shows a light cone with a yellow center and a blue outer edge. The cone is divided into horizontal slices at different heights, corresponding to the data in the table. The slices are yellow and become larger as the height increases.



Lichtdiagramm 4000K

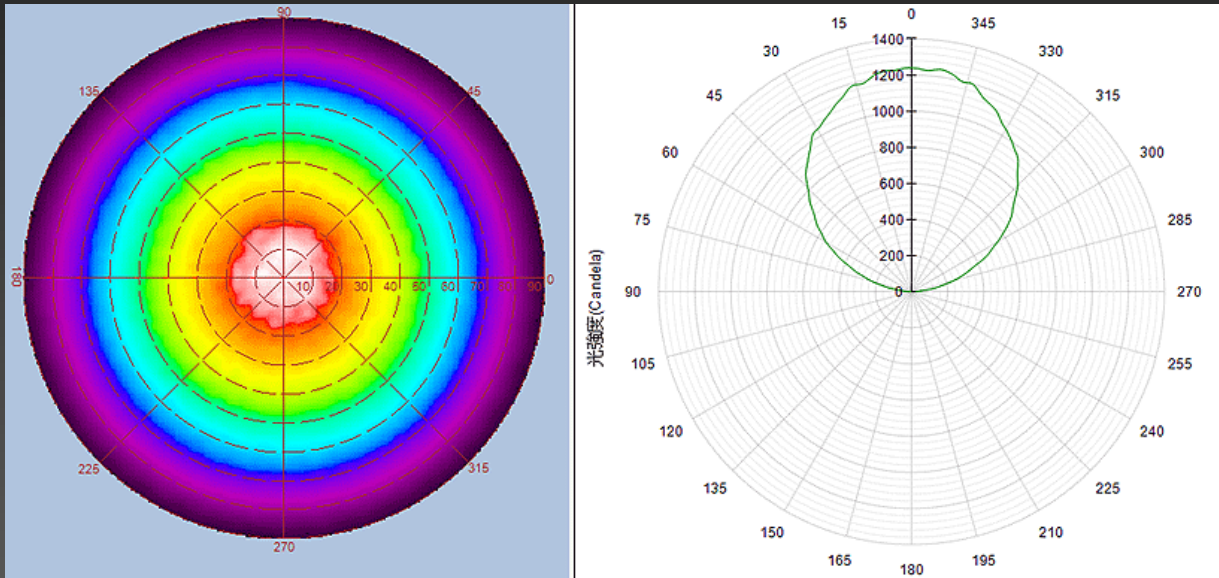

Height	E Max.	Diameter
1.0M	1226 Lx	302 cm
2.0M	309 Lx	604 cm
3.0M	136 Lx	907 cm
4.0M	75 Lx	1209 cm
5.0M	48 Lx	1511 cm

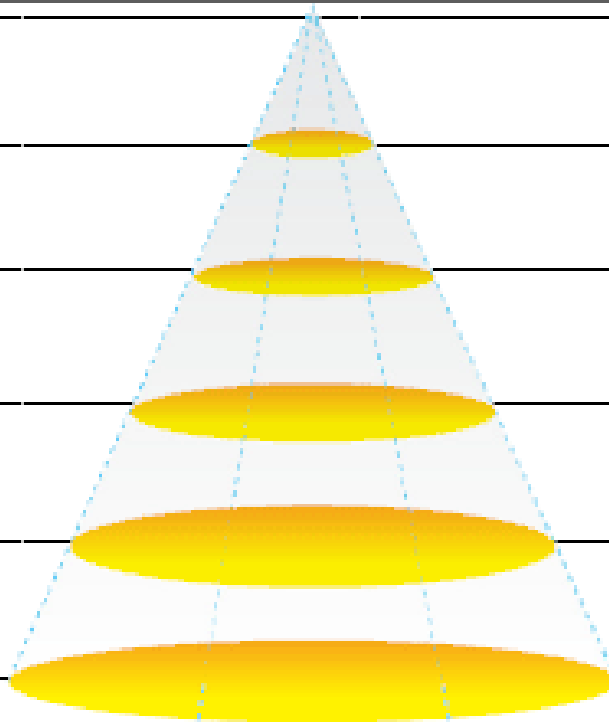









Lichtdiagramm 5700K

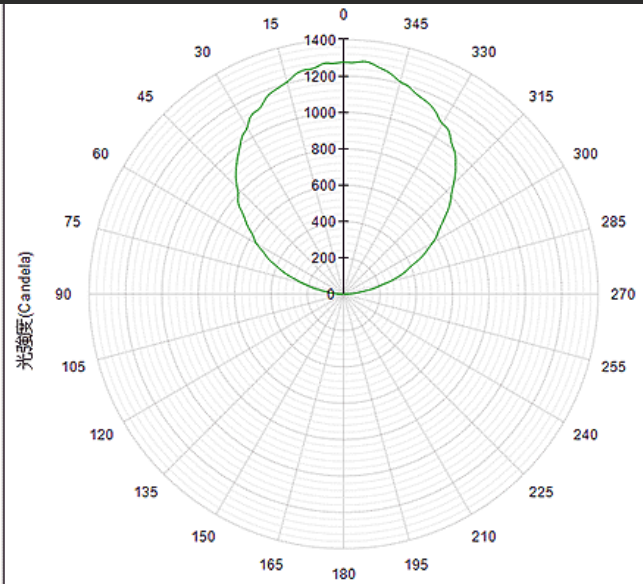
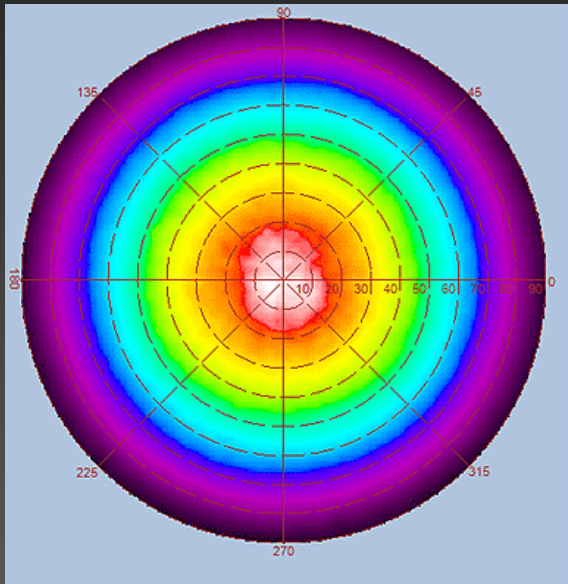


Height	E Max.	Diameter
1.0M	1315 Lx	294 cm
2.0M	335 Lx	587 cm
3.0M	146 Lx	881 cm
4.0M	83 Lx	1175 cm
5.0M	52 Lx	1469 cm

A diagram of a light cone with a dashed blue outline. Six horizontal yellow ellipses represent the beam's cross-section at heights of 1.0M, 2.0M, 3.0M, 4.0M, and 5.0M, corresponding to the data in the table.

Panel Aufbaumontage

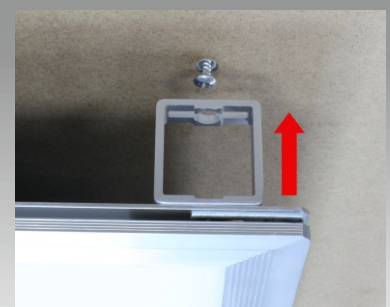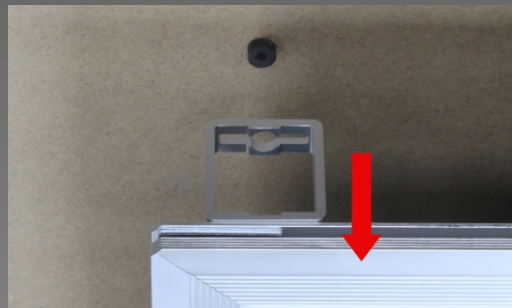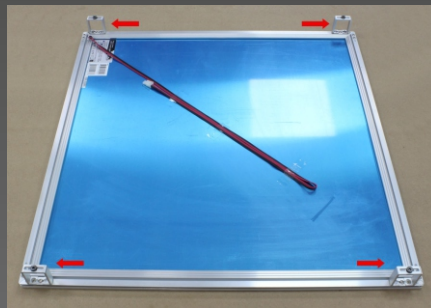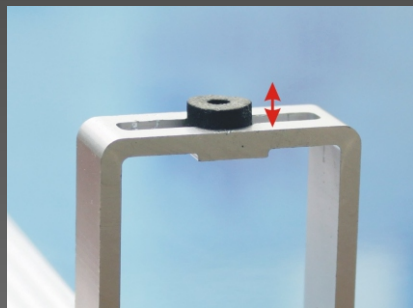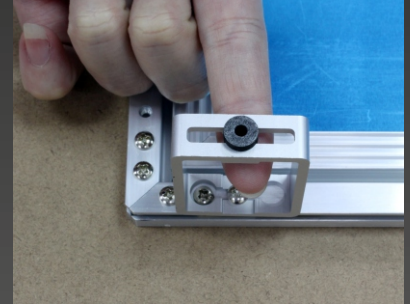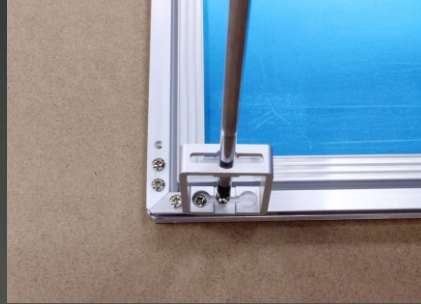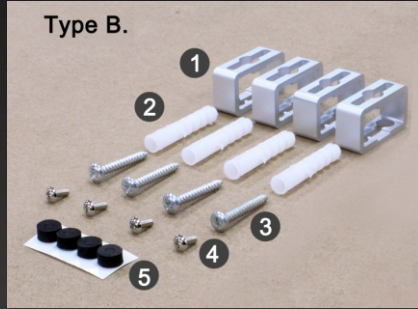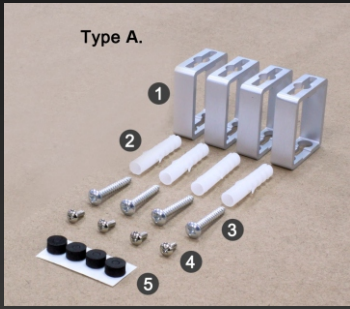

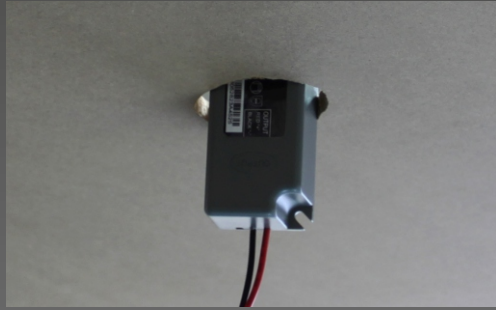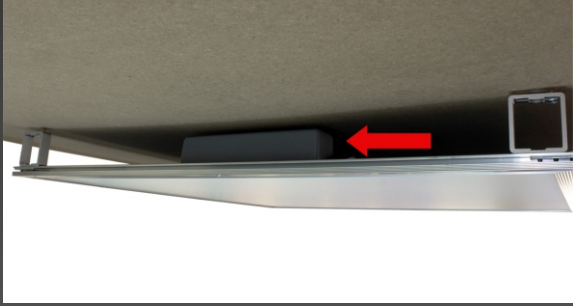

Panel hängende Montage

